

# 500W CW Ka-Band Antenna Mount High Power Amplifiers



## FEATURES

- 500 watts CW Ka-band
- Optional frequencies within 27.0 and 31.0 GHz
- Rugged 58 lb. antenna mount package
- Includes linearizer
- Complete RS-232/422/485 ethernet interface
- -40°C to +60°C ambient

The **XTD-500Ka** series are compact, self contained antenna mount power amplifiers designed for low cost installation and long life. The **XTD-500Ka** family features high RF efficiency which enables a smaller, lighter amplifier with the ability to operate at up to 60 deg C ambient temperatures.

Comtech Xicom has developed proprietary features to improve performance and life including an automatic bias control system which extends TWT life by maintaining constant beam current over time and a precise system for matching linearizer performance to a specific tube over a wide range of operating conditions maximizing useable linear power.

Optional integrated block upconverters (BUC) are available. They can be ordered with an integral 10 MHz reference module for independent operation or with external 10 MHz input for phase lock to GPS or other system clocks.


The amplifier is equipped with an internal 1:1 switch control capable of driving an input and output switch for redundancy. Rack mountable controllers are also available.




# PERFORMANCE SPECIFICATION

Parameters	XTD-500Ka
FREQUENCY RANGE	27.5 to 30 GHz (Optional frequency coverage in the 27 to 31 GHz band)
OUTPUT POWER	
Traveling Wave Tube	500W (57 dBm) CW
Rated Power @ Amplifier Flange	425W (56.28 dBm)
Linear Power @ Amplifier Flange: -19 dB NPR	170W (52.3 dBm)
GAIN	
Large Signal (minimum)	70 dB
Small Signal (minimum)	70 dB
Attenuator range (0.1 dB steps)	30 dB
Maximum SSG Variation Over	
Any Narrow Band	0.80 dB per 60 MHz
Any 1 GHz Band (maximum)	2.5 dB
Slope (maximum)	$\pm 0.04$ dB/MHz
Stability, 24 hr. (maximum)	$\pm 0.25$ dB
Stability, Temperature (maximum)	$\pm 1.0$ dB at any frequency
INTERMODULATION (maximum) with two equal carriers	-26 dBc @ 215W (53.3 dBm)
HARMONIC OUTPUT (maximum)	-60 dBc
AM/PM Conversion (maximum)	2 deg/dB @ $P_{\text{LINEAR}}$
NOISE POWER (maximum)	
Transmit Band	-75 dBW/4 kHz
Receive Band (<21.2 GHz)	-150 dBW/4 kHz
GROUP DELAY (maximum)	
Bandwidth	Any 60 MHz
Linear	0.01 nS/MHz
Parabolic	0.001 nS/MHz <sup>2</sup>
Ripple	0.5 nS/Pk-Pk
RESIDUAL AM NOISE (maximum)	-55 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz
PHASE NOISE (maximum)	20 dB below IESS phase noise profile AC fundamental -50 dBc Sum of all spurs -45 dBc
VSWR	
Input (maximum)	1.3:1
Output (maximum)	1.3:1

# BLOCK DIAGRAM

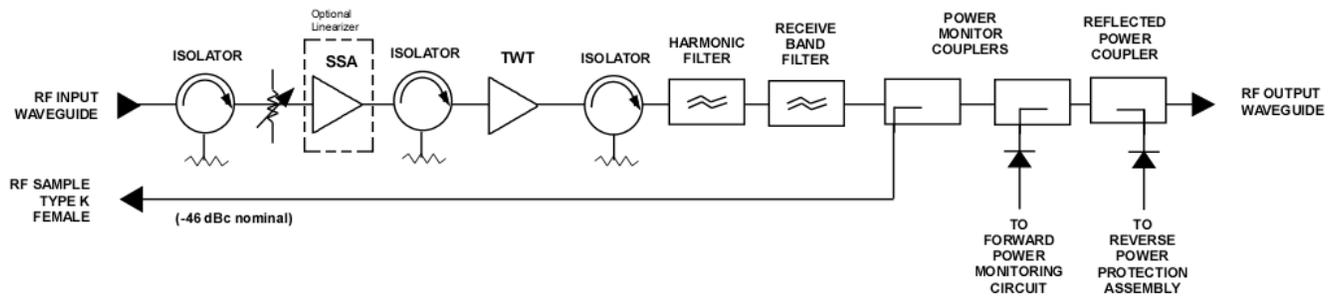

# OUTLINE DRAWING

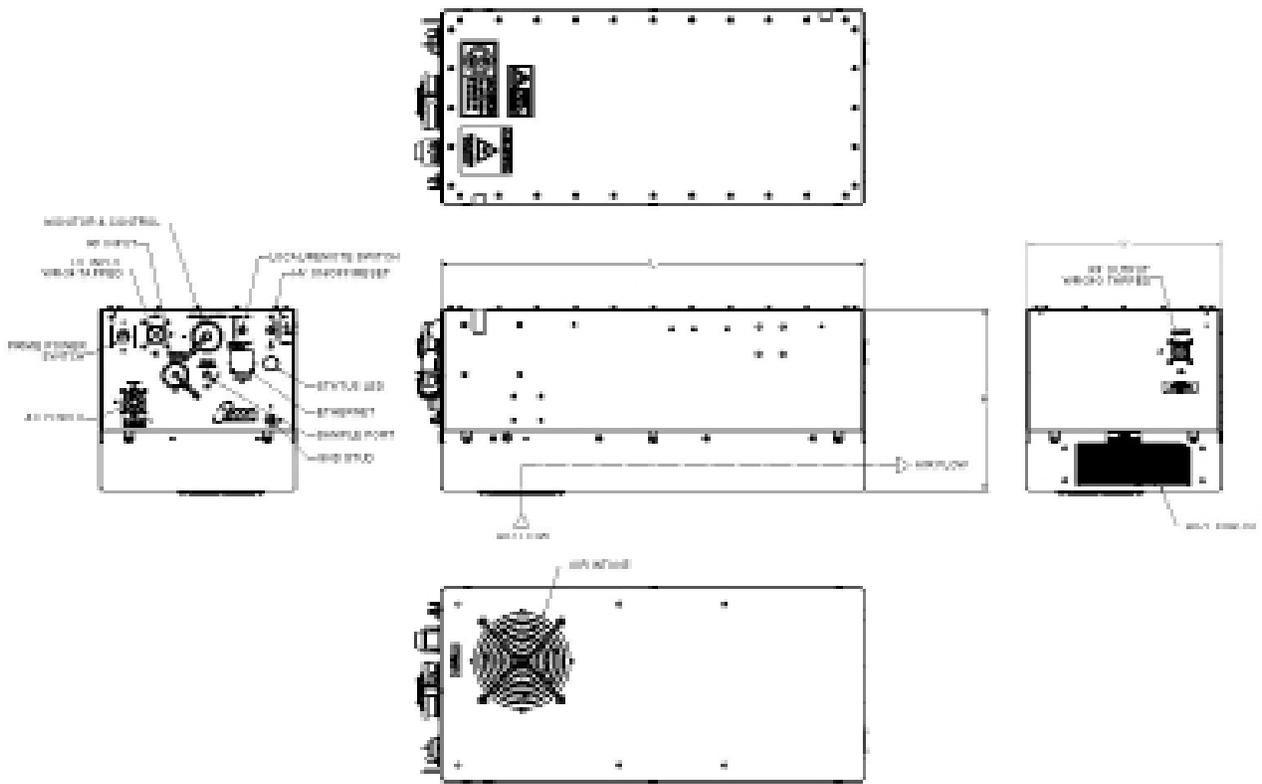

DIMENSIONS		
	INCHES	CENTIMETERS
L	22.25	56.52
H	9.50	24.13
W	10.25	26.04
Typical Weight = 58 lb (26.31 kg)		

## PRIME POWER

90 to 264 VAC  
47 to 66 Hz, Single Phase  
1400 VA Typical  
0.95 Min. Prime Power Factor



## ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C
HUMIDITY	Up to 100% Condensing
ALTITUDE	10,000 feet MSL maximum with standard adiabatic derating
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air (self cooled)

## INTERFACE

Type	Function	
LOCAL CONTROL	Prime Power ON/OFF	Local/Remote
	Power Supply ON/OFF	HV ON/OFF
LOCAL STATUS	Tri-Color LED:	
	Fault: Red	Standby: Continuous Amber
	HV ON: Green	
REMOTE CONTROL	HV ON/OFF	RF Inhibit (HV OFF)
	RF Attenuation	Fault Reset
	Heater Standby	Constant Power
REMOTE STATUS	HV ON	Heater/Beam Hours
	RF Output Power	Fault Identification
	Reflected Power	TWT Temperature
	Filament Time Delay	Helix Current
	Helix Voltage	
DISCRETE STATUS	Summary Fault (2X Form C Dry Contact Closure)	
RF MONITOR PORT	-50 dB Coupling Value (nominal)	
INTERFACE	Serial 232/422/485 Ethernet	

## OPTIONS

- WR-28 Waveguide
- Alternate Frequency Coverage in the 27 to 31 GHz Band
- Remote External Controller
- 1:1, 1:2, 1:N Redundancy
- Phase Combined
- L-Band Block Upconverter
- Nonlinearized

## Headquarters

Comtech Xicom Technology, Inc.  
3550 Bassett Street  
Santa Clara, CA 95054  
USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: [sales@xicomtech.com](mailto:sales@xicomtech.com)

Web: [www.xicomtech.com](http://www.xicomtech.com)

## European Sales Office

Comtech Xicom Technology Europe, LTD  
4 Portland Business Center  
Manor House Lane  
Datchet  
Berkshire SL3 9EG  
United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: [sales@xicomeurope.com](mailto:sales@xicomeurope.com)

Web: [www.xicomtech.com](http://www.xicomtech.com)

## Singapore Sales Office

Comtech Xicom Technology  
150 Cecil Street  
#08-02  
Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: [asiasales@xicomtech.com](mailto:asiasales@xicomtech.com)

Web: [www.xicomtech.com](http://www.xicomtech.com)

