

550 Watt Ka-Band Antenna Mount High Power Amplifiers



FEATURES

- 550 watt Ka-band, peak power
- Frequencies between 27.0 and 31.0 GHz
- Includes linearizer
- Rugged outdoor mountable
- Complete RS-232/422/485 ethernet interface
- -40°C to +60°C ambient

The **XTD-550KaL** series are compact, self contained antenna mount power amplifiers designed for low cost installation and long life. The **XTD-550KaL** family features high RF efficiency which enables a smaller, lighter amplifier with the ability to operate at up to 60 deg C ambient temperatures.

Comtech Xicom has developed proprietary features to improve performance and life including an automatic bias control system which extends TWT life by maintaining constant beam current over time and a precise system for matching linearizer performance to a specific tube over a wide range of operating conditions maximizing useable linear power.


The amplifier is equipped with an internal 1:1 switch control capable of driving an input and output switch for redundancy. Rack mountable controllers are also available.




PERFORMANCE SPECIFICATION

Parameters	Peak Power XTD-550KaL	
FREQUENCY RANGE	27.0 to 31.0 GHz	
OUTPUT POWER		
Traveling Wave Tube	550W (57.4 dBm)	
Maximum CW Power @ Amplifier Flange	240W (53.8 dBm)	
Linear Power @ Amplifier Flange: -19 dB NPR	182W (52.6 dBm)	
GAIN		
Large Signal (minimum)	70 dB	
Small Signal (minimum)	70 dB	
Attenuator range (0.1 dB steps)	30 dB	
Maximum SSG Variation Over		
Any Narrow Band	1.2 dB per 250 MHz	
Any 3.5 GHz Band	2.5 dB	
Slope (maximum)	± 0.08 dB/MHz	
Stability, 24 hr. (maximum)	± 0.25 dB	
Stability, Temperature (maximum)	± 1.0 dB at any frequency	
INTERMODULATION (maximum) with two equal carriers	-25 dBc at 230 W (53.6 dBm)	
HARMONIC OUTPUT (maximum) with optional harmonic filter	-60 dBc	
AM/PM Conversion (maximum)	2.0 deg/dB to maximum linear power	
NOISE POWER (maximum)		
Transmit Band	-75 dBW/4 kHz	
Receive Band	-150 dBW/4 kHz	
GROUP DELAY (maximum)		
Bandwidth	Any 250 MHz	
Linear	0.01 nS/MHz	
Parabolic	0.001 nS/MHz ²	
Ripple	0.25 nS/Pk-Pk	
RESIDUAL AM NOISE (maximum)	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz	
SPURIOUS (In band) Linear	-60 dBc	
PHASE NOISE (maximum)	10 Hz	-80 dBc
	100 Hz	-85 dBc
	1 kHz	-92 dBc
	10 kHz	-102 dBc
	100 kHz	-115 dBc
	1 MHz	-125 dBc
VSWR		
Input (maximum)	1.3:1	
Output (maximum)	1.3:1	

BLOCK DIAGRAM

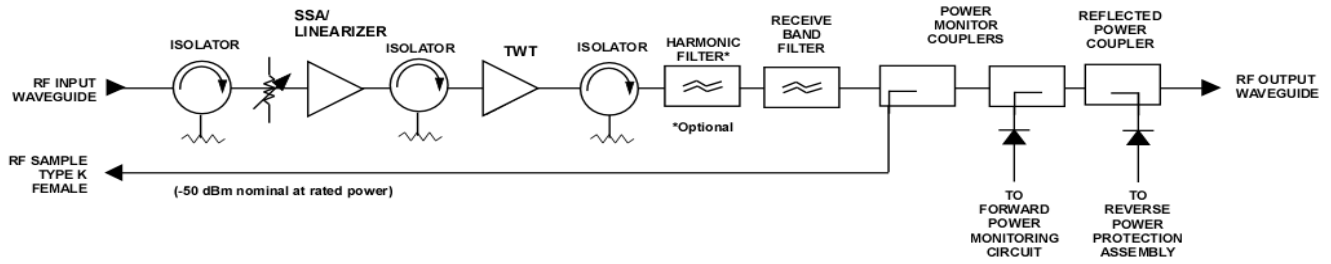

OUTLINE DRAWING

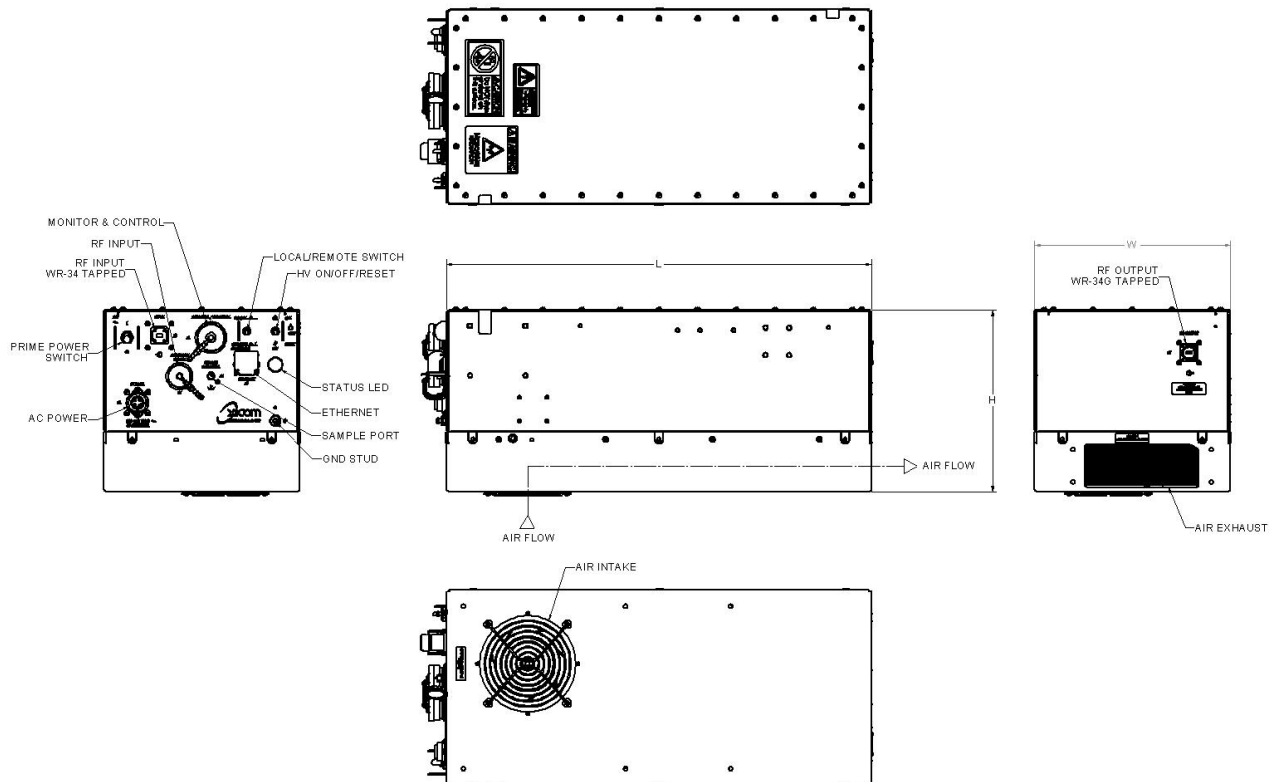

DIMENSIONS		
	INCHES	CENTIMETERS
L	22.25	56.52
H	9.50	24.13
W	10.25	26.04
Typical Weight = 58 lb (26.31 kg)		

PRIME POWER

100 to 264 Max.
47 to 66 Hz, single phase
1400 VA Typical
0.95 Min. Prime Power Factor



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C
HUMIDITY	Up to 100% Condensing
ALTITUDE	10,000 feet MSL max. with standard adiabatic derating
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air (self cooled)

INTERFACE

Type	Function	
LOCAL CONTROL	Prime Power ON/OFF	Local/Remote
	Power Supply ON/OFF	HV ON/OFF
LOCAL STATUS	Tri-Color LED:	
	Fault: Red	Standby: Continuous Amber
	HV ON: Green	FTD: Flashing Amber
REMOTE CONTROL	HV ON/OFF	RF Inhibit (HV OFF)
	RF Attenuation	Fault Reset
	Heater Standby	Constant Power
REMOTE STATUS	HV On	Heater/Beam Hours
	RF Output Power	Fault Identification
	Reflected Power	TWT Temperature
	Filament Time Delay	Helix Current
	Helix Voltage	
DISCRETE STATUS	Summary Fault (2X Form C Dry Contact Closure)	
RF MONITOR PORT	-40 dB Coupling Value (approx)	
INTERFACE	Serial RS-232/422/485 Ethernet	

OPTIONS

- Harmonic Filter
- WR-34 Waveguide Output or Input
- Alternate Frequency Coverage (27 to 31 GHz)
- Remote External Controller
- 1:1, 1:2, 1:N Redundancy
- Phase Combined
- Nonlinearized

Headquarters

Comtech Xicom Technology, Inc.
3550 Bassett Street
Santa Clara, CA 95054
USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

European Sales Office

Comtech Xicom Technology Europe, LTD
4 Portland Business Center
Manor House Lane
Datchet
Berkshire SL3 9EG
United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Singapore Sales Office

Comtech Xicom Technology
150 Cecil Street
#08-02
Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com

